

CCF PEDAL COMPACT COMPOSITE FLOOR PEDAL



AT A GLANCE

- > A COMPACT, LIGHTWEIGHT, FLOOR PEDAL OF COMPOSITE CONSTRUCTION, SUITABLE FOR ANY TYPE OF OFF HIGHWAY VEHICLE APPLICATION REQUIRING A FLOOR MOUNTED, ELECTRONIC THROTTLE PEDAL
- > PASSIVE PERFORMANCE WITH COMPLETE
 RELIABILITY, MEANS THAT THE COMPACT
 COMPOSITE FLOOR PEDAL CAN BE INSTALLED
 AND SIMPLY FORGOTTEN ABOUT
- > PERFORMANCE SPECIFICATION BASED ON KONGSBERG AUTOMOTIVE'S BENCHMARK INDUSTRIAL PEDAL SPECIFICATION
- > VSENSE™ HALL EFFECT NON-CONTACT SENSOR
 PROVIDES POSITION SENSING AND SWITCHING
 ACCURACY AND RELIABILITY

PRODUCT DESCRIPTION

The Kongsberg Automotive CCF pedal offers easy installation for floor mounted applications and is ideally suited for applications where there is only a small space available to mount the pedal.

It features the $vSENSE^{TM}$ non-contact sensor with patent-pending technology, configurable for a wide range of sensor output types.

The Kongsberg Automotive vSENSETM non-contact, programmable Hall effect sensor seals out contaminants to provide enhanced reliability in all environments. With no moving parts to wear over time, the vSENSETM sensor sets a new standard for accuracy and durability.








PRODUCT SPECIFICATIONS

PARAMETERS	SPECIFICATIONS
RATED LIFE	1,000,000 CYCLES
LOAD RATING	900N (202LB)
SPECIFICATION COMPLIANCE	FMVSS124, SAE J1455, SAE J1113
OPERATING TEMPERATURE	-40°C TO +85°C

172 172 31.5 31.5

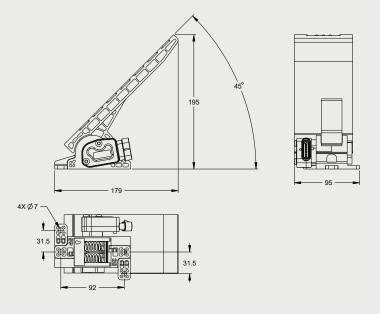

FEATURES

- > 20° PEDAL TRAVEL FROM THE REST POSITION
- > INNOVATIVE DESIGN WITH FEW PARTS AND
 A LARGE BEARING DIAMETER PROVIDING
 EXCELLENT ABILITY TO WITHSTAND HARSH
 VEHICLE ENVIRONMENTS
- > EASY MOUNTING
- > INTEGRATED SENSOR WITH METRIPACK 150 CONNECTOR

OPTIONS

- > AVAILABLE IN 35° OR 45° STARTING ANGLES
- > TWO SENSOR OUTPUT CHANNELS CAN BE CONFIGURED FOR ANALOGUE, SWITCH OR PWM OUTPUTS, DEPENDING UPON THE VEHICLE REQUIREMENTS
- > ALTERNATIVELY, THE PEDAL CAN BE CONFIGURED TO PROVIDE A CANBUS OUTPUT